

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/090336 A1

- (51) International Patent Classification⁷: **F04C 18/16**, 29/00, F16H 55/08
- (21) International Application Number: PCT/SE2004/000563
- (22) International Filing Date: 7 April 2004 (07.04.2004)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data: 0300997-4 7 April 2003 (07.04.2003) SE
- (71) Applicant (for all designated States except US): **OPCON AUTOROTOR AB** [SE/SE]; Box 2106, S-132 02 Salt-sjö-Boo (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LINDGREN, Mats** [SE/SE]; Museivägen 4, VIKMANSHYTTAN, SE-776 70 (SE).
- (74) Agents: **WENNBORG, Johan** et al.; Kransell & Wennborg AB, Box 27834, S-115 93 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **TWIN SCREW COMPRESSOR**

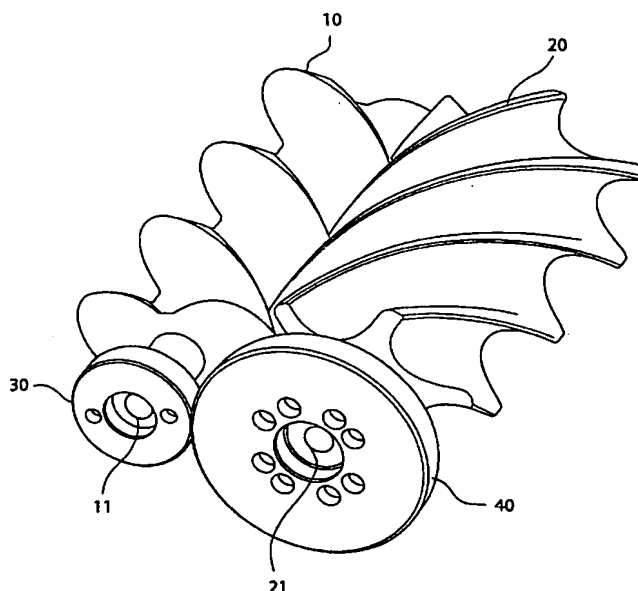

(57) Abstract: Double-screw compressor for supplying gas, such as air, to a gas consumer, which screw compressor comprises two interacting rotors for compressing the gas and also a toothed gearing. The toothed gearing comprises a gearing housing with two opposite end walls made of a first material. Two gearwheels made of a second material which has a thermal expansion coefficient which differs from the thermal expansion coefficient of the first material are mounted in the end walls. In order to reduce the effect of the temperature on the backlash, both gearwheels are designed with one and the same pressure angle which is smaller than 15°. A method for reducing the effect of the temperature on the functioning of a screw compressor is also described.